


SOIL


Euro102

tiller

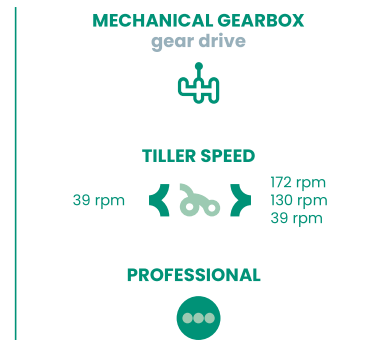

Euro102

ENGINE	Honda GX160 163 cc 3.6 kW Petrol	Euro 212.ohv 212 cc 4.0 kW Petrol	Euro 178F 296 cc 4.4 kW Diesel
STARTER	recoil	recoil	recoil or electric
HANDLEBAR	vertically and laterally adjustable		
TRANSMISSION	made in Italy gearbox with gears in oil bath 3 milling speeds, reverse two power take-offs (PTO), one standard and one synchronised with the gearbox		
ROTAVATOR	6 stars Ø34 cm of which 2 removable - 24 bolted knives work width 95-65 cm tillers rotation 172/130/39 rpm		
OTHER	plant saver discs, adjustable spur		
TRANSPORT WHEELS	optional: <ul style="list-style-type: none">• tractor profile tyres 5.00-10"• rubber to be assembled on plant saver discs		
NET WEIGHT	86 kg	95 kg	104 kg
DIMENSIONS	108X145X92(h) cm		


	GR.WEIGHT	94-112 KG
	PACKAGING	95X50,5X90(H) CM
	PALLET	110X120X195(H) CM / Q*4PCS



ROTAVATOR
bolted knives
Ø34 cm 95 cm
can be reduced to 65 cm
with discs



HANDLEBAR
vertically and laterally
adjustable

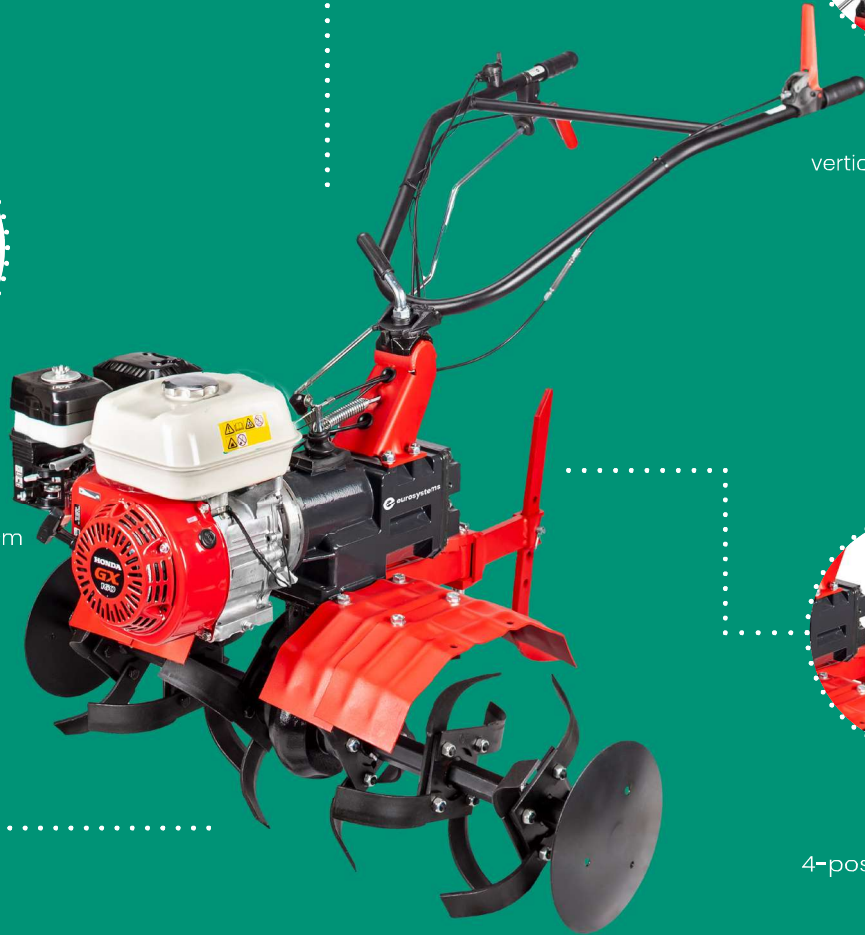

SPUR
4-position adjustable



TRACTOR WHEELS
pneumatic 5.00-10"



CUTTER EXTENSION
work width 112 cm



TRANSPORT WHEELS
to be assembled on discs



TAMPING MACHINE
with adjustable wings



AS STANDARD



OPTIONAL



PATENTED