

SOIL

# Z8

tiller

**MECHANICAL GEARBOX**  
chain + belt transmission



**TILLER SPEED**

39 rpm  101 rpm  
79 rpm  
inverted belt 142 rpm  
110 rpm


LABOUR  
39 rpm  101 rpm  
23 rpm  
inverted belt 142 rpm  
33 rpm


**SEMI-PROFESSIONAL**



## Z8

<b>ENGINE</b>	<b>Honda</b> GX160 163 cc 3.6 kW Petrol	<b>Euro</b> 212.ohv 212 cc 4.0 kW Petrol	<b>B&amp;S</b> CR950 208 cc 4.0 kW Petrol
<b>STARTER</b>	recoil		
<b>HANDLEBAR</b>	vertically and laterally adjustable		
<b>TRANSMISSION</b>	gears and chain in oil bath and belt 2+2 milling speed (rpm change via belt reversal), reverse		
<b>ROTAVATOR</b>	6 stars Ø33 cm of which 2 removable - 24 bolted knives work width 82-58 cm <ul style="list-style-type: none"><li>• standard tillers rotation 101/79 (inverted belt 142/110 rpm)</li><li>• labour tillers rotation 101/23 (inverted belt 142/33 rpm)</li></ul>		
<b>OTHER</b>	plant saver discs, adjustable spur		
<b>TRANSPORT WHEELS</b>	optional, not included		
<b>NET WEIGHT</b>	88 kg	85 kg	88 kg
<b>DIMENSIONS</b>	82X162X118(h) cm		


	<b>GR.WEIGHT</b>	93-90-93KG
	<b>PACKAGING</b>	97X52X81.5(H) CM
	<b>PALLET</b>	110X120X180(H) CM / Q* 4PCS



**TRANSMISSION**  
with reversible belt to  
change tiller rpm



**HANDLEBAR**  
vertically and laterally  
adjustable

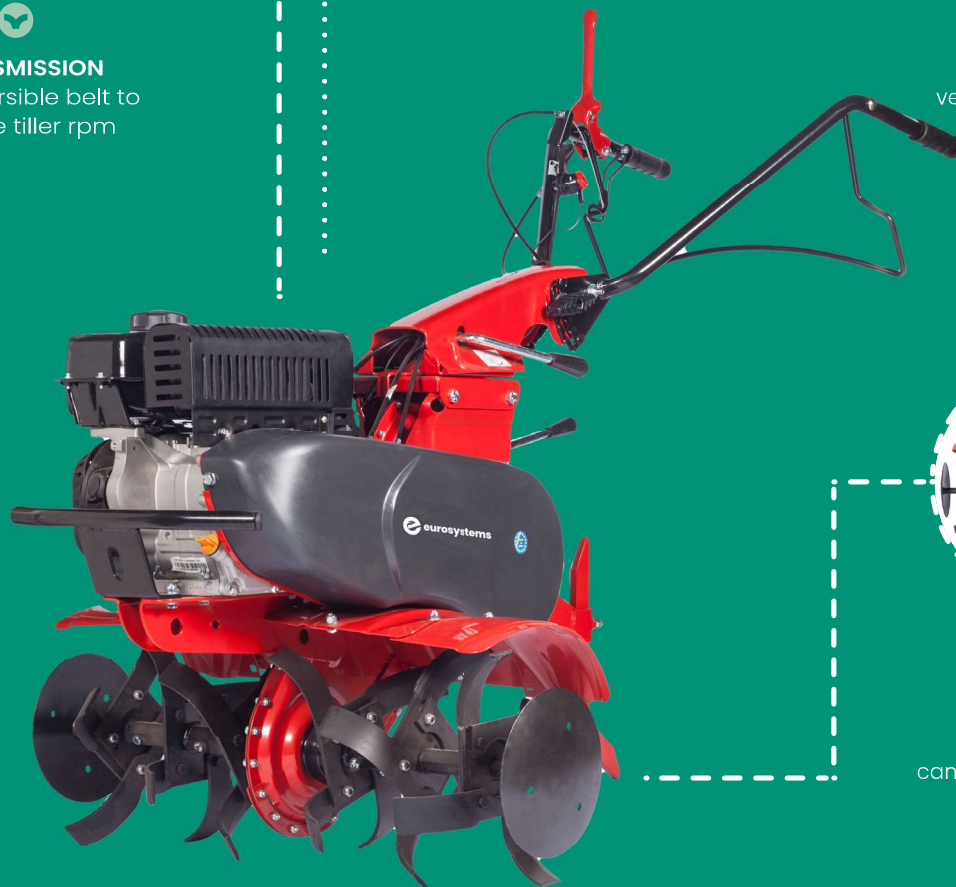

**ROTAVATOR**  
bolted knives  
Ø33 cm 82 cm  
can be reduced to 58 cm  
with discs



**TRANSPORT WHEEL**  
quick tilting



**ROTAVATOR  
EXTENSION**  
work width 105 cm



**TRANSPORT WHEELS**  
to be assembled on discs



**RIDGING PLOW**  
with adjustable wings



**LABOUR PRO KIT**  
5.00-10" wheels + Ratchets  
2 ballast wheels 20 kg each  
front ballast 15 kg  
swivel plough

*\*only for Z8 labour*



**AS STANDARD**



**OPTIONAL**



**PATENTED**