

Eurosystems **The future down to earth**

CATALOGUE 20025













1 season

Haymaking

tificial

Garden

Soil

The use of FSC-certified paper is just one part of Eurosystems efforts to reduce its environmental impact.

The 2025 catalogue and all the product use and maintenance manuals are made in this way.

The Forest Stewardship Council is an international non-profit NGO and is the only certification organisation that is recognised internationally today.

There are currently about 230 million hectares of forests certified worldwide, of which 75 thousand are located in Italy.

This certification ensures that the forests are managed in a way that preserves biodiversity, minimises environmental impacts and provides economic and social benefits to local communities.





The future down to earth

Ours is a constantly evolving artisan work. We create machines that are simple to use and last over time, designed to bring different generations closer to gardening and horticulture.

We want to facilitate these jobs to make them accessible to everyone, just like nature.

Our products are manufactured in Italy and they reach many destinations: a piece of our history thus arrives in the garden or in the company of a customer on the other side of the world who shares our own passion.

It all started 50 years ago from Luzzara, in the province of Reggio Emilia, where we have seen our fathers work the land and then we have learned too.

Here our story began and from here it continues and continues to grow.

66

It is no coincidence that we were born here, everyone here has worked the fields for centuries

Carlo Bovi



Index

4 SEASONS - MULTI TO	201 I One engine	andlessuses
Multi tool	P130 P70 evo P55 evo Minieffe	08 16 24 34
HAYMAKING - SCYTH	E MOWERS, ROTAR	RY SCYTHES The art of mowing
Scythe mowers	M310 M210 M90	42 44 46
Rotary scythes	Rs210 Rs90	48 50
ARTIFICIAL LAWN - DE	COMPACTOR, MO	TOR-BRUSHES Synthetically perfect!
Decompactor Motor-brushes	Deco90 Sweepy Sandy	54 56 58
De-thatcher	Tpm42	60
LAWN - RIDE ON MOW	/ERS, SCARIFIERS	A professionally prepared lawn
Ride on mowers	Slalom Asso	64 66
Scarifiers	Sc42 & Sc42F	68
GARDEN - WHEEL BAR	ROWS, MOTOR-SP	PRAYER Effortless gardeners
Motocarriole Motosprayer	Carry Carry Sprayer Eco Sprayer	72 74 76
SOIL - REAR TINE TILLE	RS, TILLERS Passi	ion for vegetable gardens
Rear tine tillers	Rtt3 Rtt2	80 82
Tillers	Euro102 Z8 Euro5 evo Euro3 evo Z3 Z2 LaZappa Z1	82 84 86 88 92 94 96 98



One engine, endless uses.

The Eurosystems multi-tool machines are designed and built for maximising the engine's efficency: allowing the machine to be used throughout the whole year means minimising the resources, the consumption and the maintenance.

From the hobbyist to the professional, from the care of wild lawns to the gardens, from the vineyards to the orchards, from the soil cultivation to the cleaning of outdoor surfaces, Eurosystems offers a series of models and tools that adapt to every need.

What are the benefits?

1 2 3

A wide range of tools designed to fully exploit the potential of the machine in all 4 seasons, maximising its effectiveness and possibilities of use Better use of the storage area: even with limited space available, it will be possible to have a fleet of machines suitable for all work requirements Reduction and efficiency of engine maintenance operations, less use of primary material resources and reduction of the related environmental impact





	P130			P130 ALPINE			
ENGINE	B&S 3125 PB 344 cc 6.9 kW Petrol	B&S 3130 Intek 344 cc 7.8 kW Petrol	Honda GXV390 389 cc 7.6 kW Petrol	Honda GXV390 389 cc 7.6 kW Petrol	B&S 4195 Intek 500 cc 11.7 kW Petrol	B&S Vanguard V-Twin 479 cc 11.9 kW / 16 HP Petrol	
STARTER	recoil	recoil & electric	recoil or recoil & electric	recoil & electric	recoil & electric	electric	
HANDLEBAR	vertically and laterally adjustable + storage position				vertically and laterally adjustable + storage position		
TRANSMISSION	2 independent hydrostatic transaxels ZT-2200 (EZT) max slope: 25° max torque: from 0 to 291 Nm			2 independent hydrostatic transaxels ZT-2800 advanced max slope: 45° max torque: from 0 to 406 Nm			
РТО	multi-plate clutch vertical PTO with coupling			multi-plate clutch vertical PTO with coupling			
SLOPE ENGINE	_			electronic board and actuator for tilting of the engine			
STEERING SYSTEM	PAS (powered assisted steering)			PAS (powere	d assisted steerin	g)	
DRIVE WHEELS	tyres, tractor profile (18x9.5-8")			tyres, tractor profile (18x9.5-8")			
NET WEIGHT	162 kg	167 kg	169kg / 174kg	178 kg	175 kg	184 kg	
DIMENSIONS	97x169x128(h)			97x169x128(h)			



GR. WEIGHT 194-216 KG


PACKAGING 144X97X95(H) CM

PALLET 147X100X190(H) CM / Q* 2PCS



FOLDING HANDLEBAR

for placing into storage position via control



CONTROL CONSOLE

speed management, tool connection, work mode, adjustment management





ADJUSTABLE HANDLEBAR laterally (3 positions) and vertically (7+1 positions)





SLOPE ENGINE

with electronic board and actuator, maximum side slope 40-45°





TOOL COUPLING

vertical coupling with instant handlebar connection system





PAS STEERING SYSTEM

servo-assisted



AS STANDARD



ALPINE VERSION



PATENTED

WHEELS & EXTENSIONS



IRON WHEELS Track EZT 96 cm Track ZT 99 cm



GROSS WEIGHT 37 KG PACKAGING 52X52X55(H) CM



SMALL TYRES Track EZT 81.6 cm Track ZT 84.6 cm



GROSS WEIGHT 20 KG PACKAGING 52X52X55(H) CM



IRON EXTENSION FOR **TYRES** Track ZT 137.5 cm *Alpine



GROSS WEIGHT 38 KG **PACKAGING** 52X52X55(H) CM



SNOW CHAINS For standard pneumatic wheels 18x9.5-8"



GROSS WEIGHT 3 KG PACKAGING 52X52X55(H) CM



IRON EXTENSION FOR **IRON WHEELS** Track ZT 149 cm *Alpine



GROSS WEIGHT 31.5 KG PACKAGING 52X52X55(H) CM



CLAWED WHEELS Track ZT





GROSS WEIGHT 20 KG PACKAGING 52X52X55(H) CM

DOUBLE ROTARY SCYTHE

cutting discs (x2) with 4 inclined, **OPERATION**

pivoting and retractable blades

115 cm **WORK WIDTH**

ADJUSTMENTS fixed cutting height

at 5 cm

TRANSPORT WHEELS two pivoting and tilting

front wheels

OTHER

protective sheetdouble-toothed drive beltautomatic braking system

 idle rotating counter discs reinforced steel discs

127 kg

PIVOTING BALDES

(X4 EACH)

DIMENSION 120x128x65(h) cm



DOUBLE ROTARY

P130

multi tool

FLAIL MOWER

OPERATION ø 30 cm horizontal axis rotor

with 32 floating knives

WORK WIDTH

ADJUSTMENTS

cutting height 2<->10 cm with wheels 2<->7 cm with skids

TRANSPORT WHEELS pivoting on

tilting axle

OTHER

100 kg

DIMENSION 94x100x70(h) cm







G.WEIGHT 115 KG - PACKAGING 109X97X54(H) CM - PALLET 109X97X162(H) CM / Q* 3PCS

GRASSLAND MOWER

OPERATION double rotor with vertical axis

with 8 pivoting blades (4 each)

WORK WIDTH

cutting height ADJUSTMENTS

5 - 7 - 9 cm with fixed positions

TRANSPORT WHEELS single, quick release

mulching cutting cap

• 2 ballasts 4 kg each.

NET WEIGHT

DIMENSION 97x117x61(h) cm



FOLDABLE TRANSPORT WHEEL



G.WEIGHT 81 KG - PACKAGING 109X97X54(H) CM - PALLET 110X98X162(H) CM / Q* 3PCS

WEED BRUSH

quick-connect brush plate Ø 60 cm **OPERATION**

WORK WIDTH 60 cm

work heightlateral ±90°plate inclination ADJUSTMENTS

0°-2.5°-5°-7°

TRANSPORT WHEELS single pivoting

5 sets of interchangeable brushes

NET WEIGHT 71 kg

DIMENSION 93x104x62(h) cm







G.WEIGHT 85 KG - PACKAGING 109X97X54(H) CM - PALLET 110X98X162(H) CM / Q* 3PCS



BRISTLE SET IRON FLAT plate + flat bristles to be assembled on flange (not included)



BRISTLE SET IN THICK IRON 8 bundles to be assembled on plate and flange (not included)



BRISTLE SET PLASTIC plate + plastic bristles to be assembled on flange (not included)



BRISTLE SET IN MIXED IRON 4+4 bundles to be assembled on plate and flange (not included)



BRISTLE SET IN IRON FINE 8 bundles to be assembled on plate and flange (not included)

P130

multi tool

CUTTING BAR

double-blade cutting system **OPERATION**

ESMww wide bar portal movement

WORK WIDTH

ADJUSTMENTS cutting height

via skids 3<->6 cm

two swivel wheels with TRANSPORT WHEELS


quick coupler

professional BIDOUX blade **OTHER**

change system

DIMENSION 153x120x53(h) cm

G.WEIGHT 122 KG - PACKAGING 158X130X43(H) CM - PALLET 158X130X86(H) CM / Q* 2PCS

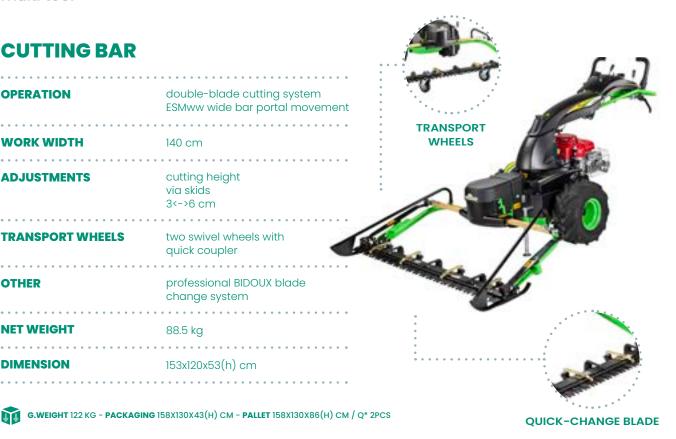

HAY RAKE

8 combs on belt **OPERATION**

2 pairs of tines for combs

WORK WIDTH

ADJUSTMENTS work height

via front wheels

TRANSPORT WHEELS rubber, pivoting

hay holder strip for **OTHER**

adjustable rake

NET WEIGHT

DIMENSION 156x126x102(h) cm

G.WEIGHT 125 KG - PACKAGING 157X80X102H) CM - PALLET 152X81X230(H) CM / Q*2PCS



SNOW BLADE

OPERATION front blade with rubber strip 120 cm **ADJUSTMENTS** adjustable work height by means of skids • lateral ±30° TRANSPORT WHEELS shock-proof rubber protection 119x161x134(h) cm






G.WEIGHT 55 KG - PACKAGING 120X58X48(H) CM - PALLET 110X120X205(H) CM / Q* 8PCS

SNOW THROWER

OPERATION	double stage with rotor Ø 40 cm icebreaker rotavators	
WORK WIDTH	90 cm	
ADJUSTMENTS	 work height 0 - 6 cm snow deflector 90° cm adjustable ejection flue 	
TRANSPORT WHEELS	side slides	
OTHER	control extension rodflue cleaner pipe	
NET WEIGHT	130 kg	
DIMENSION	91.5x161x143(h) cm	



G.WEIGHT 162 KG - PACKAGING 109X97X54(H) CM - PALLET 110X98X162(H) CM / Q* 3PCS

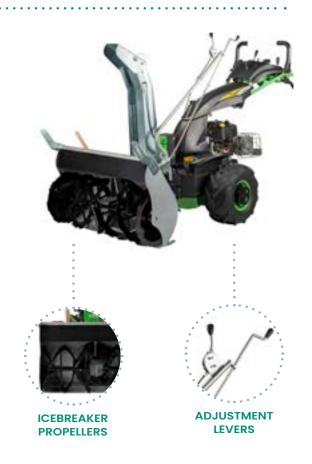

P70evo

multi tool



P70evo

ENGINE	B&S 850 E series 190 cc 3.7 kW Petrol	B&S 850 IS series 190 cc 3.7 kW Petrol	B&S 1000 Pxi 223 cc 4.2 kW Petrol	Euro 224.ohv 224 cc 4.4 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol
STARTER	recoil	electric	recoil	recoil	recoil
HANDLEBAR	reversible, laterally and vertically adjustable				
TRANSMISSION	gears and endless	s screw in oil bath c	and belts	• • • • • • • • • • • • • • •	• • • • • • • • • • • •
GEARS	machine configuration with front tool: 3 speed forward, 2 speed reverse machine configuration with rear tool: 2 speed forward, reverse				
РТО	vertical with belt				
SLOPE ENGINE	optional kit consisting of ballast and motor coupling system to work laterally on steep terrain (up to 45°)				
STEERING SYSTEM	reversible				
DRIVE WHEELS	tyres, tractor profile with mechanical semi-differential (15x6.00-6")				
NET WEIGHT	55 kg	58 kg	56 kg	58 kg	59 kg
DIMENSIONS	57x135x110(h)				

11

GR. WEIGHT 61-63 KG

PACKAGING 88X56X61(H) CM

PALLET 90X120X195(H) CM / Q* 6PCS









The slope engine KIT allows, through the use of a ballast, the addition of a 25° rotation to the motor which means it can be used efficiently on steep terrain

Patented system Ballast || KG



AS STANDARD



OPTIONAL



PATENTED

P70evo

multi tool

BRUSH CUTTER

OPERATION self-winding head

wire Ø3 mm with 4 outputs

(20-40mm)

capacity: 2 x 7.5m rolls

60 cm

ADJUSTMENTS

plate inclination 0-6°lateral to fixed positions:

0° - 15° - 30° - 45°

TRANSPORT WHEELS

 handlebar control for wire OTHER

extension

protective barriers

NET WEIGHT

86x62x39(h) cm

G.WEIGHT 25 KG

PACKAGING 73X71X42.5(H) CM - **PALLET** 80X120X225(H) CM / Q* 5PCS



WIRE EXTENSION **COMMAND**

GRASSLAND MOWER

6 pivoting blades on a **OPERATION**

vertical cross rotor

WORK WIDTH

ADJUSTMENTS cutting height

5 - 8 cm

with fixed positions

TRANSPORT WHEELS

NET WEIGHT

68x92x48(h) cm

G.WEIGHT 30 KG - PACKAGING 92X69.5X42(H) CM - PALLET 92X70X210(H) CM / Q* 5PCS





CUTTING BAR

OPERATION double blade movement, two oscillating blades WORK WIDTH 107 cm **ADJUSTMENTS** cutting height 2<->5.5 cm with skids TRANSPORT WHEELS grass spreader hood adjustable skids OTHER

NET WEIGHT 23 kg DIMENSION 111x68x30(h) cm





G.WEIGHT 26 KG - PACKAGING 112X38X32(H) CM PALLET 110X120X232(H) CM -Q* 18PCS

ROTAVATOR

16 curved riveted knives **WORK WIDTH ADJUSTMENTS** work depth TRANSPORT WHEELS -adjustable spur **NET WEIGHT** 24 kg **DIMENSION** 55x78x58(h) cm





G.WEIGHT 27 KG - PACKAGING 67X58X42(H) CM PALLET 134X114X180(H) CM -Q* 16PCS

ROTARY SCYTHE

OPERATION 4 retractable pivoting blades **WORK WIDTH** fixed cutting height **ADJUSTMENTS** at 3.6 cm TRANSPORT WHEELS rake kit (accessory) **NET WEIGHT** 27 kg 67x78x49(h) cm DIMENSION





G.WEIGHT 29 KG - PACKAGING 70X60X37(H) CM PALLET 80X120X197(H) CM -Q* 10PCS

P70evo

multi tool

TRANSPORT TANK

tilting sheet metal tank **OPERATION**

load-bearing capacity: 85 lt. - 75 kg

WORK WIDTH

ADJUSTMENTS

TRANSPORT WHEELS tyres 20x7.5 cm

OTHER 140-litre tank extension with

quick coupling system

(optional)

NET WEIGHT

DIMENSION 71x108x86(h) cm



G.WEIGHT 26 KG - PACKAGING 88X56X61(H) CM - PALLET 90X120X195(H) CM / Q* 6PCS



TILTING TANK

FLAT TANK

OPERATION flat platform in sheet metal

with tilting plastic tank

load-bearing capacity: 160 I - 75 kg

WORK WIDTH

ADJUSTMENTS

TRANSPORT WHEELS tyres 20x7.5 cm

OTHER

88x155x87(h) cm



G.WEIGHT 38 KG - PACKAGING 111X66X71(H) CM - PALLET 114X134X225(H) CM / Q* 6PCS



HAY RAKE

7-comb belt with **OPERATION** double tine

WORK WIDTH 100 cm

ADJUSTMENTS work height

via front wheels

TRANSPORT WHEELS rubber

OTHER hay holder strap

adjustable

NET WEIGHT

DIMENSION 152x218x130(h) cm

OPTIONALS & TOOLS HAY HOLDER G.WEIGHT 113.5 KG - PACKAGING 145X80X102(H) CM

-PALLET 152X81X204(H) CM -Q* 2PCS

DETHATCHER

OPERATION 96 springs on rotor

Ø25 cm

WORK WIDTH

ADJUSTMENTS

TRANSPORT WHEELS in rubber 20x5 cm

OTHER

NET WEIGHT

71x96x39(h) cmDIMENSION





G.WEIGHT 28.5 KG - PACKAGING 80X59X57(H) CM -PALLET 80X120X240(H) CM -Q* 8PCS

RIDGING PLOW

OPERATION rear quick coupler

WORK WIDTH 29 cm

ADJUSTMENTS

TRANSPORT WHEELS

NET WEIGHT

DIMENSION 29x35x48(h) cm

G.WEIGHT 3.7 KG - PACKAGING 30X30X20(H) CM

-PALLET 90X120X100(H) CM -Q* 40PCS



P70evo

multi tool

SNOW THROWER

OPERATION turbine with ice breaking propellers

double-stage

WORK WIDTH 52 cm

ADJUSTMENTS height 2 - 3 cm

90° deflector180° ejection flue

TRANSPORT WHEELS

flue control rodflue cleaner pipe OTHER

DIMENSION 61.5x189x93(h) cm

G.WEIGHT 50 KG - PACKAGING 88X56X61(H) CM - PALLET 90X120X195(H) CM / Q* 6PCS



PROPELLERS

SNOW BLADE

OPERATION adiustable blade

with front attachment

WORK WIDTH 85 or 100 cm

 height 0-2 cm **ADJUSTMENTS**

lateral orientation ±30°

TRANSPORT WHEELS

rubber shock-proof strip

85x126x109 (h) cm DIMENSION

100x126x109(h) cm

G.WEIGHT 22 KG - PACKAGING 90X29X45(H) CM - PALLET 90X120X192(H) CM / Q* 16PCS G.WEIGHT 34 KG - PACKAGING 101X29X46(H) CM - PALLET 90X120X196(H) CM / Q* 12PCS





VACUUM - BLOWER

OPERATION suction fan + blower pipe

WORK WIDTH 78 cm

ADJUSTMENTS height 2<-> 6.4 cm

TRANSPORT WHEELS rubber pivoting

• 185 I removable bag OTHER

• blower Ø10x250 cm

NET WEIGHT

DIMENSION 86x149x152(h) cm



G.WEIGHT 52 KG - PACKAGING 120X80X95(H) CM -PALLET 80X120X190(H) CM -Q* 2PCS

BRUSH

.

OPERATION polypropylene brush

Ø30 cm

WORK WIDTH 88 cm

ADJUSTMENTS lateral ±25°


TRANSPORT WHEELS rubber pivoting

removable holders **OTHER**

(x2)

NET WEIGHT

DIMENSION 79x183x78(h) cm

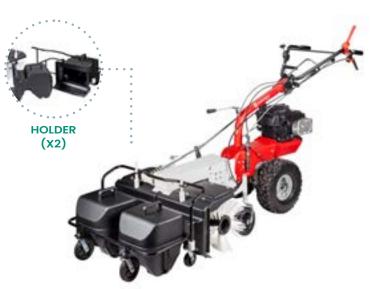



G.WEIGHT 50 KG - PACKAGING 107X89X52(H) CM -PALLET 90X120X220(H) CM -Q* 4PCS

ECO SPRAYER

.

OPERATION 12V 4.1 bar pump batteries (x2) 12V 5A/h

TANK 50 litres

COMPATIBLE LIQUIDS water, cryoform,

fertilisers, pesticides

TRANSPORT WHEELS

OTHER handwashing tank

lance hose 9 m

.

DIMENSION 71x149x111(h) cm



P55evo

multi tool



P55evo

ENGINE	Euro 196.ohv 196 cc 3.8 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol	B&S 675 EXi series 163 cc 2.8 kW Petrol	Honda GCV170 166 cc 3.6 kW Petrol	EGOpower+ e-powered 56 V 3.1 kW Electric
STARTER	recoil	recoil	recoil	recoil	electric
HANDLEBAR	fast adjustment system reversible, laterally and vertically adjustable				
TRANSMISSION	gears and endless screw in oil bath and belts				
GEARS	forward, reverse				
PTO	vertical with belt				
SLOPE ENGINE	-				
STEERING SYSTEM	reversible				
DRIVE WHEELS	tyres, tractor proifle (13x5,00-6")				
NET WEIGHT	45 kg	41 kg	41 kg	42 kg	44 kg
DIMENSION	55x112x105(h)				

11

GR. WEIGHT 46-49 KG

PACKAGING 80X59X57(H) CM

PALLET 80X120X240(H) CM / Q* 8PCS





P55evo

multi tool

GRASSLAND MOWER CLASSIC

OPERATION single blade

WORK WIDTH

ADJUSTMENTS adjustable cutting height at

5-8-10.5 cm

TRANSPORT WHEELS skids

NET WEIGHT

DIMENSION 61.5x95x35(h) cm



G.WEIGHT 25.5 KG - PACKAGING 88X26X63(H) CM - PALLET 90X120X252(H) CM / Q* 12CS



OPERATION single rotor

with 4 pivoting blades

WORK WIDTH 53 cm

ADJUSTMENTS handlebar with quick adjustment,

work height 5-8-10.5 cm

TRANSPORT WHEELS skids

OTHER cutting height adjustment

from the handlebar

• protective courtains

NET WEIGHT

96x61.5x35(h) cm **DIMENSION**

GWEIGHT 27 KG - **PACKAGING** 93.5X71.5X44.5(H) CM - **PALLET** 92X70X210(H) CM / Q* 5PCS



CLASSIC MOWING BLADE

GRASSLAND MOWER PRO V2

single rotor **OPERATION**

with 4 pivoting blades

WORK WIDTH 53 cm

handlebar quick adjustment ADJUSTMENTS

system, work height

5-8-10.5 cm

TRANSPORT WHEELS couple of front pivoting wheels with blocking system

cutting height adjustment from **OTHER**

the handlebar

23.5 kg **NET WEIGHT**







P55evo

multi tool

BRUSH CUTTER

self-winding head **OPERATION**

wire Ø3 mm with 4 outputs (20-40mm) capacity: 2 x 7.5m rolls

deck inclination 0-6°side deck at

0° - 15° - 30° - 45°

TRANSPORT WHEELS

handlebar control for wire

extension protective walls

NET WEIGHT 20 kg

86x62x39(h) cm

G.WEIGHT 23 KG - PACKAGING 73X71X42.5(H) CM - PALLET 80X120X225(H) CM / Q* 5PCS





CUTTING BAR

OPERATION double blade movement

oscillating lower and upper

blade

WORK WIDTH

ADJUSTMENTS cutting height

TRANSPORT WHEELS


Eurosystems skids includedESM optional skids OTHER

Eurosystems 16 kg

ESM 15 kg

DIMENSION 87x60x26 (h) cm

89x39x20 (h) cm





ROTAVATOR

rear connection **OPERATION**

16 knives

WORK WIDTH 50 cm, Ø26 cm

ADJUSTMENTS working depth:

0<->6,5 cm

TRANSPORT WHEELS

adjustable spur

NET WEIGHT

DIMENSION 56x48x61(h) cm





G.WEIGHT 21 KG - PACKAGING 52X52X55(H) CM - PALLET 110X120X236(H) CM / Q* 16PCS

ROTARY SCYTHE

4 retractable pivoting blades **OPERATION**

WORK WIDTH

ADJUSTMENTS fixed cutting height at 3,2 cm

TRANSPORT WHEELS

rake kit

(optional)

NET WEIGHT

DIMENSION 64x76x45(h) cm





G.WEIGHT 27 KG - PACKAGING 70X60X37(H) CM - PALLET 80X120X197(H) CM / Q* 10PCS

P55evo

multi tool

BRUSH

OPERATION

Ø30 cm polypropylene

WORK WIDTH

ADJUSTMENTS lateral ±25°

TRANSPORT WHEELS

NET WEIGHT

SIZE 104x86x100(h) cm



G. 40 KG - PACKAGING 108X64X43(H) CM -PALLET 120X80X237(H) CM -Q* 5PCS



COLLECTION BRUSH

OPERATION horizontal brush

Ø30 cm polypropylene

WORK WIDTH

lateral ±25°

TRANSPORT WHEELS rubber pivoting

OTHER removable holder

40 kg **NET WEIGHT**

SIZE 88x128x101(h) cm





G.46 KG - PACKAGING 100X87X44(H) CM -PALLET 120X90X240(H) CM -Q* 5PCS

TRANSPORT TANK

OPERATION tilting sheet metal tank

load-bearing capacity: 85 lt. - 75 kg

WORK WIDTH

ADJUSTMENTS

TRANSPORT WHEELS tyres 20x7.5 cm

OTHER 140-litre tank extension with

> quick coupling system (optional accessory)

NET WEIGHT

SIZE 82x97x35.5 (h) cm

G.WEIGHT 28 KG - PACKAGING 88X56X61(H) CM - PALLET 90X120X195(H) CM / Q* 6PCS



FLAT TANK

OPERATION flat platform in sheet metal

with tilting plastic tank

load-bearing capacity: 160 lt. - 75 kg

WORK WIDTH

ADJUSTMENTS

NET WEIGHT 34 kg

SIZE 88x155x87(h) cm





GROSS WEIGHT 36 KG - PACKAGING 116X53X70(H) CM - PALLET 110X120X222(H) CM / Q* 6PCS

P55evo

multi tool

SNOW BLADE

adjustable blade **OPERATION** with front attachment

WORK WIDTH

 height 0-2 cm **ADJUSTMENTS**

• lateral ±30°

TRANSPORT WHEELS

shock-proof rubber

NET WEIGHT

85x93x96(h) cm

G.WEIGHT 20 KG - PACKAGING 88X31X47(H) CM -PALLET 90X120X196(H) CM -Q* 16PCS

DETHATCHER

OPERATION 96 springs on rotor Ø25 cm

WORK WIDTH 60 cm

TRANSPORT WHEELS in rubber 20x5 cm

OTHER

NET WEIGHT

62x62x33(h) cm



SIDE ADJUSTABLE

BLADE



GROSS WEIGHT 20 KG - PACKAGING 70X64X37(H) CM -PALLET 80X120X197(H) CM -Q* 10PCS

RIDGING PLOW

OPERATION rear quick coupler **ADJUSTMENTS** TRANSPORT WHEELS **NET WEIGHT** 29x35x48(h) cm



G.WEIGHT 3.7 KG - PACKAGING 30X30X20(H) CM -PALLET 90X120X100(H) CM -Q* 40PCS

ECO SPRAYER

OPERATION 12V 4.1 bar pump batteries (x2) 12V 5A/h

50 litres

COMPATIBLE LIQUIDS water, cryoform, fertilisers, pesticides

TRANSPORT WHEELS tyres 20x7.5 cm

handwashing tank

lance

hose 9 m

71x149x111(h) cm







GROSS WEIGHT 43 KG - PACKAGING 144X66X71(H) CM -PALLET 114X134X230(H) CM -Q* 6PCS





Minieffe

• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • •
ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	B&S 625 EXi series 150 cc 2.3 kW Petrol	Euro 196.ohv 196 cc 3.8 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol	Honda GCV170 166 cc 3.6 kW Petrol
STARTER	recoil				
HANDLEBAR	vertically adjustable	le			
TRANSMISSION	endless screw in oi	il bath and belt	• • • • • • • • • • • • • •		
GEARS	forward gear	forward gear, optional reverse gear	forward gear, optional reverse gear	forward gear, optional reverse gear	forward, reverse
РТО	vertical with belt				
SLOPE ENGINE	_				
STEERING SYSTEM	_				
DRIVE WHEELS	tyres, tractor profile 13x5,00-6" (minieffe one-gear) puncture-proof, tractor profile 13x6,00-6" (minieffe reverse)				
NET WEIGHT	36.5 kg	41 kg	42 kg	39 kg	40 kg
DIMENSIONS	65x105x100(h)				

11

GR.WEIGHT 40.5-45-44 KG **PACKAGING** 80X59X57(H) CM

PALLET 80X120X240(H) CM / Q* 8PCS



tractor profile ver. mono - 13x5,00-6" ver. reverse - 13x6,00-6"



Minieffe

multi tool

GRASSLAND MOWER CLASSIC

*cannot be used with B&S450 engine

OPERATION	mowing single blade
WORK WIDTH	53 cm
ADJUSTMENTS	cutting height 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	-
PNET	22 kg
DIMENSION	61.5x95x35(h) cm

PLOR 25.5 KG - IMBALLO 88X26X63(H) CM - PALLET 90X120X252(H) CM / Q* 12PZ



GRASSLAND MOWER PRO

*cannot be used with B&S450 engine

OPERATION	4 floating knives
WORK WIDTH	53 cm
ADJUSTMENTS	cutingh height 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	cutting height adjustment on the handlebar
PNET	25 kg



DIMENSION

G.WEIGHT 27 KG - PACKAGING 93.5X71.5X44.5(H) CM - PALLET 92X70X210(H) CM /

96x61.5x35(h) cm



NEW! GRASSLAND MOWER PRO V2

*cannot be used with B&S450 engine

OPERATION 4 floating knives **WORK WIDTH** 53 cm cutting height 5-8-10.5 cm front pivoting wheels with TRANSPORT WHEELS blocking system cutting height adjustment on

the handlebar

25 kg **PNET**

96x61.5x35(h) cm **DIMENSION**

G.WEIGHT 27 KG - PACKAGING 93.5X71.5X44.5(H) CM - PALLET 92X70X210(H) CM /



BRUSH CUTTER

cannot be used with egine B&S450

OPERATION self-winding head

wire Ø3 mm with 4 outputs (20-35mm)

capacity: 2 x 7m rolls

60 cm **WORK WIDTH**

ADJUSTMENTS • plate inclination 0-6°

 lateral to fixed positions: 0° - 15° - 30° - 45°

TRANSPORT WHEELS

· handlebar control for wire OTHER

extension

• protective walls

NET WEIGHT 23 kg

DIMENSION 86x62x39(h) cm

G. WEIGHT 26 KG - PACKAGING 73X71X42(H) CM - PALLET 80X120X225(H) CM / Q* 5PCS



ADJUSTMENT

CUTTING BAR

OPERATION

single-blade movement **Q** fixed lower blade

oscillating upper blade

ADJUSTMENTS

TRANSPORT WHEELS

self-greasing head

NET WEIGHT 18 kg

DIMENSION 53x93x30(h) cm





G. WEIGHT 18 KG - PACKAGING 40X88X28(H) CM -PALLET 90X120X202(H) CM -Q* 18PCS

4 SEASONS

Minieffe

multi tool

ROTARY SCYTHE

cannot be used with B&S450 engine

OPERATION 4 retractable pivoting blades

WORK WIDTH

ADJUSTMENTS fixed cutting height at 3.2 cm

TRANSPORT WHEELS

OTHER rake kit

(optional)

NET WEIGHT

DIMENSION 76x64x45(h) cm



G. WEIGHT 27 KG - PACKAGING 70X60X37(H) CM - PALLET 80X120X197(H) CM / Q* 10PCS

SNOW BLADE

OPERATION adjustable blade

with front attachment

WORK WIDTH 85 cm

• height 0-2 cm • lateral ±30°

lateral ±30°

TRANSPORT WHEELS

shock-proof rubber

NET WEIGHT 18 kg

DIMENSION 85x93x96(h) cm

G. WEIGHT 20 KG - PACKAGING 88X31X47(H) CM -PALLET 90X120X196(H) CM -Q* 16PCS



RAKE KIT

(OPTIONAL)

BRUSH

OPERATION horizontal brush

Ø30 cm polypropylene

WORK WIDTH 105 cm

ADJUSTMENTS lateral ±25°

TRANSPORT WHEELS

NET WEIGHT

86x105x100(h) cm DIMENSION



G. WEIGHT 40 KG - PACKAGING 108X64X43(H) CM -PALLET 120X80X237(H) CM -Q* 5PCS

COLLECTION BRUSH

OPERATION horizontal brush

Ø30 cm polypropylene

WORK WIDTH

ADJUSTMENTS lateral ±25°

TRANSPORT WHEELS rubber pivoting

NET WEIGHT

128x87x101(h) cm **DIMENSION**



SIDE ADJUSTABLE

BRUSH



G. WEIGHT 46 KG - PACKAGING 100X87X44(H) CM -PALLET 120X90X240(H) CM -Q* 5PCS



The art of mowing.

Haymaking is an art that calls for time, experience, patience and precision. Eurosystems has been commited to designing and building high quality grass cutting equipment for over 50 years to guarantee its customers a practical, efficient and robust machine.

Eurosystems' lengthy experience, its many qualitative tests and checks and its use of professional solutions for hobby and semi professional uses make Eurosystems mowers work tools extremely reliable and durable, ideal for small and medium-sized plots of land.

What are the benefits?

0 2 3

We are European category leaders, we produce amateur and semiprofessional mowers with the best value for money on the market We minimise waste: we design our machines to last over time and to be repaired at low costs even after 20 years We adapt professional cutting solutions to amateur machines offering the highest work performance in the category



MECHANICAL REDUCER

belt transmission



RUNNING SPEED



SEMI-PROFESSIONAL



M310

R200.ohv 196.ohv **ENGINE** 196 cc 200 cc

3.8 kW 3.5 kW Petrol Petrol

STARTER recoil recoil

HANDLEBAR laterally and vertically adjustable

TRANSMISSION endless screw in oil bath and belt

double blade movement - oscillating upper and lower blade CUTTING

mowing bar: Eurosystems SYSTEM cutting width 127 cm

OTHER Eurosystems cutting bar with skids, cutting 3 cm

tyres, tractor profile with mechanical semi-differential (15x6.00-6") **DRIVE WHEELS**

NET WEIGHT 69 kg 65 kg

DIMENSIONS 131x159x90(h) cm

GR.WEIGHT 73-69 KG

PACKAGING 80X59X57(H) CM

80X120X240(H) CM / Q* 8PCS PALLET





MECHANICAL REDUCER

belt transmission



RUNNING SPEED



AMATEUR



7	71	
M	ZI	U

ENGINE	B&S 450 E 125 cc 1.8 kW Petrol	B&S 625 EXI 150 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R170.ohv 173 cc 3.2 kW Petrol	Honda GCV170 166 cc 3.6 kW Petrol	EGOpower+ e-powered 56 V 3.1 kW Electric	
STARTER	recoil	recoil	recoil	recoil	recoil	electric	
HANDLEBAR	laterally and v	ertically adjustak	ble				
TRANSMISSION	endless screw	in oil bath and b	elt				
CUTTING SYSTEM	double blade movement - oscillating upper and lower blade mowing bar: Eurosystems or ESM cutting width 87 cm						
OTHER	Eurosystems cutting bar with adjustable skids, adjustable cutting height 1.5 <-> 4.7 cm ESM cutting bar with optional adjustable skids, adjustable cutting height 1.5 <-> 4.7 cm						
DRIVE WHEELS	puncture proc	of, tractor profile 1	3x5.00-6"				
NET WEIGHT	50.5 kg	51 kg	50.5 kg	51.5 kg	51 kg	54 kg	
DIMENSIONS	87x157x90(h) cm						


GR.WEIGHT 54.5-59 KG

PACKAGING 80X59X57(H) CM

80X120X240(H) CM / Q* 8PCS PALLET



M90 scythe mower




	M90			NEW!		
ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	Euro 123.ohv 123 cc 2.2 kW Petrol	B&S 625 EXi series 150 cc 2.3 kW Petrol	Euro R145.ohv 145 cc 2.5 kW Petrol		
STARTER	recoil					
HANDLEBAR	vertically adjustable					
TRANSMISSION	endless screw in oil bath and belt					
CUTTING SYSTEM	single blade movement: fixed lower blade, oscillating upper blade cutting width 87 cm cutting height 2.0 cm					
OTHER	_					
DRIVE WHEELS	puncture proof, tractor profile 13x5.00-6"					
NET WEIGHT	48.5 kg	48.5 kg	49 kg	49 kg		
DIMENSIONS	93x138x104(h) cm					

11

GR.WEIGHT 51.5-52.5 KG

PACKAGING 80X59X57(H) CM

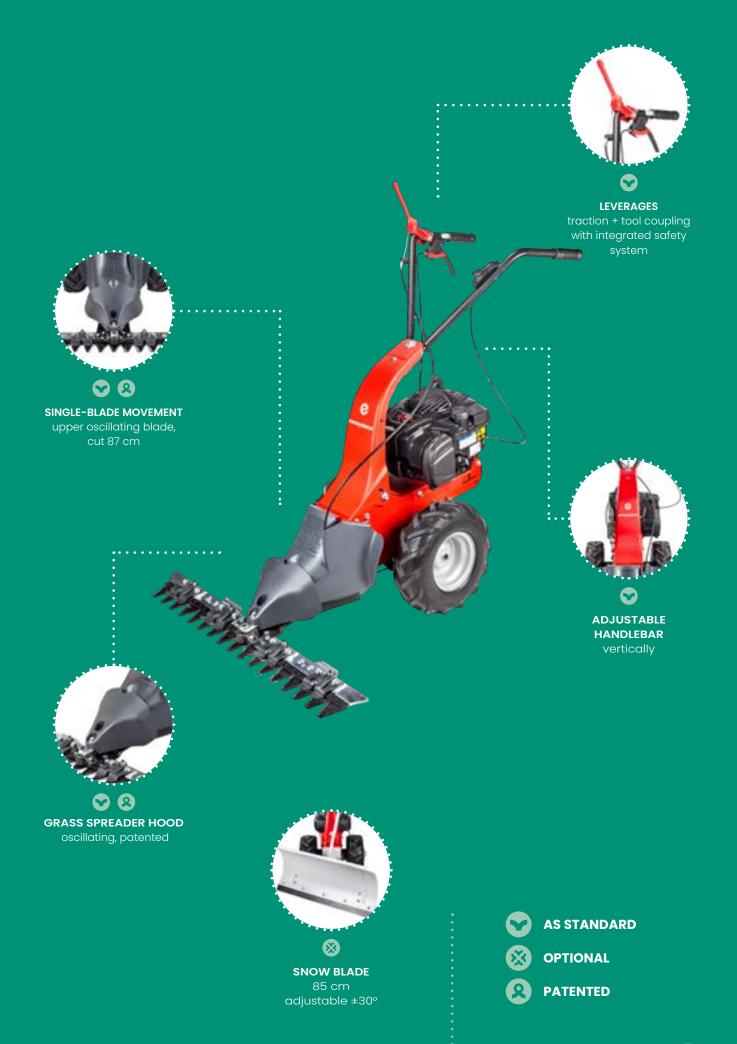



MECHANICAL REDUCER
belt transmission

RUNNING SPEED

2.6 Km/h

AMATEUR

Rs210

ENGINE	B&S 675 EXi series 163 cc 2.8 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol	Euro 196.ohv 196 cc 3.8 kW Petrol			
STARTER	recoil					
HANDLEBAR	laterally and vertically adjustable					
TRANSMISSION	endless screw in oil bath and belt					
CUTTING SYSTEM	rotary disc with vertice fixed cutting height 3.2	al axis Ø64 cm with 4 retr 2 cm	actable blades			
OTHER	rake kit (optional)					
DRIVE WHEELS	puncture proof, tracto	r profile 13x5.00-6"				
NET WEIGHT	65 kg	66 kg	66 kg			
DIMENSIONS	67x164x107(h) cm					

GR.WEIGHT 69-68 KG

PACKAGING MACHINE 80X59X57(H) CM ROTARY DISC 70X60X37(H) CM

PALLET MACHINE 80X120X240(H) CM / Q* 8PZ ROTARY DISC 80X120X164(H) CM / Q* 8PCS





RAKE KIT
strip with side sheet for
windrow creation



SNOW BLADE 85 cm adjustable ±30°







MECHANICAL REDUCER
belt transmission

RUNNING SPEED

2.6 Km/h

AMATEUR

Rs90

ENGINE	B&S 575 Ex series 140 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R170.ohv 173 cc 3.2 kW Petrol		
STARTER	recoil			•	
HANDLEBAR	vertically adjustable				
TRANSMISSION	endless screw in oil bat	h and belt			
CUTTING SYSTEM	rotary disc with vertical axis Ø57 cm with 4 retracted blades fixed cutting height 3.2 cm				
OTHER	rake kit (optional)				
DRIVE WHEELS	puncture proof, tractor	profile 13x5.00-6"			
NET WEIGHT	62.5 kg	63 kg	63 kg	•	
DIMENSIONS	64x162x107(h) cm			•	

G.WEIGHT

PACKAGING

PALLET

66 KG

MACHINE 80X59X57(H) CM ROTARY DISC 70X60X37(H) CM

MACHINE 80X120X240(H) CM / Q* 8PCS ROTARY DISC 80X120X164(H) CM / Q* 8PCS





RAKE KIT strip with side sheet for windrow creation



SNOW BLADE 85 cm adjustable ±30°



AS STANDARD



OPTIONAL



PATENTED



ARTIFICIAL LAWN Decompactor and motor brushes

Synthetically... perfect!

Less care required and less wastage of water resources: these are just some of the reasons that have led synthetic grass pitches to be used more and more frequently, both for domestic and for sports use.

However, this does not mean that these pitches do not require periodic maintenance and cleaning operations.

Eurosystems has developed a complete range of products that allow the lawn to last for a long time while optimally maintaining its physical-technical characteristics.

What are the benefits?



A complete range to perform the necessary maintenance in small and medium-sized domestic or sports fields Products developed in collaboration with professional maintenance technicians and installers in order to obtain certified results Correct cleaning and maintenance of synthetic grass lawns extend their useful life and maintain their physical-technical characteristics over time



MECHANICAL GEARBOX

belt transmission



RUNNING SPEED



2.5 Km/h 1.1 Km/h

SEMI-PROFESSIONAL



Deco90

Briggs&Stratton

1000 Pxi

ENGINE 223 cc

4.3 kW Petrol

STARTER

laterally and vertically adjustable **HANDLEBAR**

TRANSMISSION gears and endless screw in oil bath and belts

rotor 80 cm with 156 springs, 142 rpm **WORKING**

brushes (x2) 90 cm dione oscillating one fixed, polypropylene bristles 95 mm **SYSTEM**

independent engagement levers for rotor and brush

spring rotor work depth 0 <-> 5 cm **ADJUSTMENTS**

brush height precision adjustment 0 <-> 1 cm

tyres, tractor profile with mechanical semi-differential (15x6.00-6") **DRIVE WHEELS**

4 swivel wheels Ø17.5 cm

OTHER limit stops for transport

optional kit with 11 kg front ballast system

NET WEIGHT 143 kg


.

DIMENSIONS 105x168x95(h) cm

GR.WEIGHT 172.5 KG

PACKAGING 168X105X96(H) CM

168X105X192 (H) CM / Q* 2PCS **PALLET**

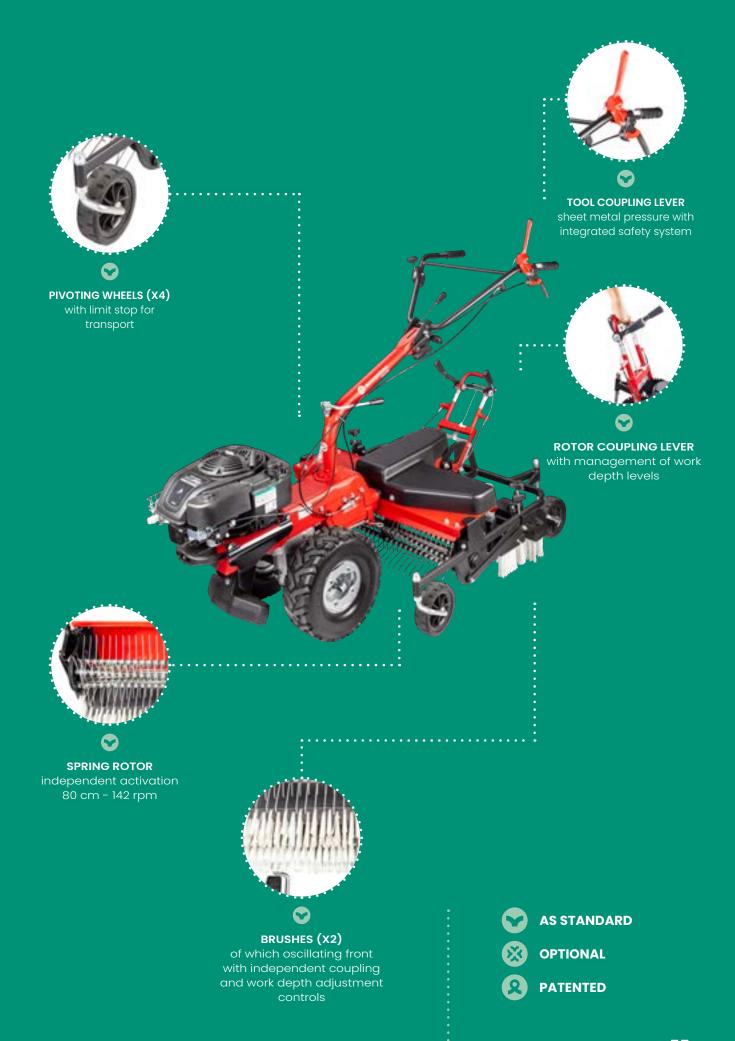





Sweepy


ENGINE	B&S 675 Exi series 163 cc 2.8 kW Petrol	Euro R170.ohv 173 cc 3.2 kW Petrol	Euro 196.ohv 196 cc 3.8 kW Petrol	Honda GCVx170 166 cc 3.6 kW Petrol	EGOpower+ e-powered 56 V 3,1 kW Electric		
STARTER	recoil	recoil	recoil	recoil	electric		
TRANSMISSION	v-belt						
ROTOR	nylon helical brus work width 36 cm rotation speed 2.6	, adjustable work	depth 0 <-> 2 cm				
OTHER	45 It collection bo	ıg					
DRIVE WHEELS	Ø20 cm non-driven self-cleaning solid rubber wheels with ball bearings						
NET WEIGHT	34 kg	34 kg	35.5 kg	34 kg	36 kg		
DIMENSIONS	56x121x100(h) cm						

11

GR.WEIGHT 38-40 KG

PACKAGING 80X59X57(H) CM



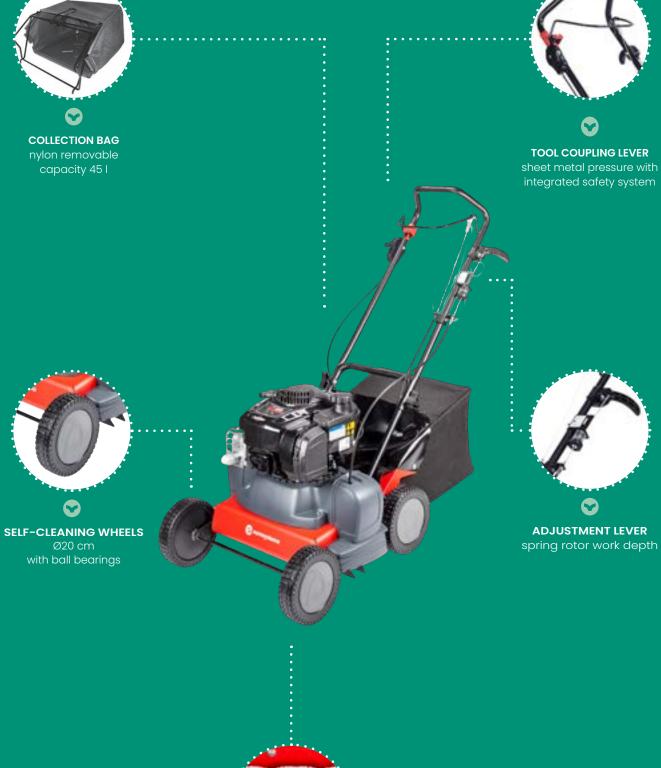



HELICAL BRUSH in nylon 36 cm 2,600 rpm







Sandy

Euro

E900

ENGINE 900 W

230 V 50 Hz Electric

STARTER electric

HANDLEBAR adjustable into double pre-set positions

TRANSMISSION endless screw

polypropylene brush Ø28 cm

BRUSH work width 60 cm

rotation speed 150 rpm

direction of rotation: towards the operator

OTHER -

WHEELS -

NET WEIGHT 18 kg

DIMENSIONS 68x112x107(h) cm

GR.WEIGHT 21 KG

PACKAGING 80X59X57(H) CM









Tpm42

ENGINE	Euro 196.ohv 196 cc 3.8 kW Petrol	Honda GCVx170 166 cc 3.6 kW Petrol			
STARTER	recoil	recoil			
TRANSMISSION	v-belt				
ROTOR	rotor with 56 springs work width 38 cm, adjustable work depth 0 <-> 2 cm rotation speed 2.600 rpm				
OTHER	45 lt collection bag				
DRIVE WHEELS	Ø20 cm non-driven self-cleaning solid rubber wheels with ball bearings				
NET WEIGHT	35 kg	34 kg			
DIMENSIONS	56x121x100(h) cm				

ŢŢ

GR.WEIGHT 39-38 KG

PACKAGING 80X59X57(H) CM



collection BAG nylon removable capacity 45 l



TOOL COUPLING LEVER sheet metal pressure with integrated safety system



SELF-CLEANING WHEELS Ø20 cm with ball bearings



0

ADJUSTMENT LEVER spring rotor work depth



DE-THATCHER 56 springs INOX



AS STANDARD



OPTIONAL



PATENTED



A professionally prepared lawn

A line of products dedicated to lawn care composed by ride on mowers and scarifier.

The Eurosystems ride on mowers offer comfortable seating, certified safety systems and various cutting options, from mulching to collecting cut. The Sc42 scarifier makes maneuvrability and ease of use its main features.

The Sc42 scarifier can now be supplied also with battery engine EGO power + 56V.

What are the benefits?

0 2 3

One of the last Italian lawn mowers on the market which means a short production chain and for the most part local as well as lower consumption and pollution Efficient and responsive after-sales service through a widespread network across the territory which means there is always a fast service and spare parts are always available even in high season

Safe, simple and intuitive, both during use and during adjustment and/or maintenance.
All the models are certified and comply with the European safety regulations





	Slalom 67		Slalor	m 76	Slalor	m 82
ENGINE	Euro 352.ohv 352 cc 7.2 kW Petrol	B&S 3105PB 344 cc 7.7 kW Petrol		B&S 3125PB 344 cc 9.2 kW Petrol	Euro 352.ohv 352 cc 7.2 kW Petrol	B&S 3125PB 344 cc 9.2 kW Petrol
STARTER	electric		electric		electric	
• • • • • • • • • • • • • • • • • • • •			• • • • • • •		• • • • • • •	
TRANSMISSION	rear hydrostatic with differential		rear hydrostatic with differential		rear hydrostatic with differential	
• • • • • • • • • • • • • • •	• • • • • • • •	• • • • • • • • • • • •			• • • • • • • • • • • • • • • • • • • •	
DECK	collection blade cutting width 67 cm cutting height 4-10 cm		collection blade recycler blade removable m cutting width 76 cm cutting height 4-8.5 cm recycler blade removable m cutting width cutting heigh		mulching cap Ith 80 cm	
• • • • • • • • • • • • • • •	• • • • • • • • •	• • • • • • • • • • • •				
OTHER	150 lt collec	ction bag	150 lt collection bag		150 lt collection bag	
• • • • • • • • • • • • • • •			• • • • • • • • • • • • • • • • • • • •			
DRIVE WHEELS	rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"		rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"		rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"	
• • • • • • • • • • • • • •	• • • • • • • •	• • • • • • • • • • • •	• • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • •	• • • • • • • • • • • • • • • • • • • •
NET WEIGHT	143 kg		143 kg		165 kg	
• • • • • • • • • • • • •	• • • • • • • •	• • • • • • • • • • •	• • • • • • •		• • • • • • •	• • • • • • • • • • • • • •
DIMENSIONS	82x195x104((h) cm	84x195x104((h) cm	88x195x104(h) cm	
• • • • • • • • • • • • • •	• • • • • • • •	• • • • • • • • • • • •				

↓↓

GR.WEIGHT 150 KG

PACKAGING 151X84X86(H) CM

PALLET 151X84X172(H) CM / Q* 2PCS



LAMA RECYCLER lama recycler *standard for Slalom82



DEFLECTOR for cutting without collection









	Asso 67		Asso 70	Asso 76		
ENGINE	Euro 352.ohv 352 cc 7.2 kW Petrol	B&S 3105PB 344 cc 7.7 kW Petrol	Euro 352.ohv 352 cc 7.2 kW Petrol	B&S 3125PB 344 cc 9.2 kW Petrol		
STARTER	electric	•••••••	electric	••••••		
TRANSMISSION	rear mechanical with differential		rear mechan	rear mechanical with differential		
DECK	collection blade cutting width 67 cm cutting height 4-10 cm		cutting width	collection blade cutting width 76 cm cutting height 4-8.5 cm		
OTHER	150 lt collection	n bag	150 lt collectio	on bag		
DRIVE WHEELS	rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"		rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"			
NET WEIGHT	143 kg		143 kg			
DIMENSIONS	82x195x104(h)	cm	84x195x104(h)) cm		

GR.WEIGHT 150 KG

PACKAGING 151X84X86(H) CM

PALLET 151X84X172(H) CM / Q* 2PCS



collection blade cut 67 or 76 cm



DEFLECTOR for cutting without collection



MULCHING KIT recycler blade + plate cap *only for Asso76



AS STANDARD




OPTIONAL



PATENTED

Sc42 NEW!Sc42F

de-thatchers



	Sc42			Sc42 F		
ENGINE	Euro R145.ohv 145 cc 2.5 kW Benzina	Honda GCVx170 166 cc 3.6 kW Benzina	EGOpower+ e-powered 56 V 3,1 kW Elettrico	B&S 450 E series 125 cc 1.8 kW Benzina	Euro 123.ohv 123 cc 2.2 kW Benzina	
STARTER	recoil	recoil	electric	recoil	recoil	
TRANSMISSION	v-belt					
ROTORS	Sc42 fix knives working width 40 cm adjustable working depth 0 <-> 2 cm rotor speed rotation 3.200 rpm			Sc42: fix knives Sc42F: floating knives working width 40 cm adjustable working depth 0 <-> 2 cm rotor speed rotation 3.200 rpm		
OTHER	collecting bo	ıg 45 It (optional)	,			
DRIVE WHEELS	Ø20 cm non-	-driven self-cleanin	g solid rubber wheels	s with ball bearings		
NET WEIGHT	32.5 kg	32.5 kg	34 kg	32.5 kg	33 kg	
DIMENSIONS	56x121x100(h)	cm				

note: Sc42 is commercialized with all the engines, Sc42F only with B&S 450 and Euro 123OHV



GR.WEIGHT 36.5-38KG

PACKAGING 80X59X57(H) CM



FLOATING KNIVES 18 knives *on mod. SC42F



collecting BAG nylon, removable capacity 45 lt





Effortless gardeners

We design and build simple but robust machines that make physically strenuous work easier:

The Eurosystems motor wheelbarrows are designed to transport heavy and bulky objects. The battery-powered also means it can be used in closed environments such as greenhouses and warehouses.


The Eurosystems motosprayers are instead designed for the selective spraying of orchards, vineyards and vegetable gardens; the possibility of using different types of liquids allows these tools to be extremely useful and versatile.

What are the benefits?

1 2 3

Manoeuvrability and steering comfort thanks to the technical solutions designed and adopted to facilitate the use and steering of our machinery Reduction of physical effort in gardening activities considered tiring which translates into the work being more pleasant and accessible to all Our models are designed to last over time and can be easily repaired even many years after purchase





	Carry			NEW!	Carry BA	ATTERY	
ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	Euro 123.ohv 123 cc 2.2 kW Petrol	Honda GCVx170 166 cc 3.6 kW Petrol	Euro R.145 145 cc 2.5 kW Benzina	Euro Battery 24 V 300 W Electric	EGOpower+ e-powered 56 V 3.1 kW Electric	
STARTER	recoil				electric		
TRANSMISSION	endless screw in oil bath and belts 1 forward gear, reverse gear				endless screw in oil bath and belts 1 forward gear, reverse gear		
TANK	tilting galvanised sheet metal tank max. capacity 85 lt. max. load-bearing capacity 100 kg				tilting galvanised sheet metal tank max. capacity 85 lt. max. load-bearing capacity 100 kg		
OTHER	-		2 lead batteries 12V 5Ah each	optional lithium batteries			
DRIVE WHEELS	tractor profile front tyres 13x5.00-6" with mechanical semi-differential				tractor profile fr 13x5.00-6" with r semi-differentic	nechanical	
NET WEIGHT	57 kg	60 kg	60 kg	58 kg	93 kg	61 kg	
DIMENSIONS	65x145x100(h)	cm	• • • • • • • • • • • •		65x145x100(h) cr	m 	

GR.WEIGHT PALLET

62-64 KG **PACKAGING** 110X65X70(H) CM 114X134X225(H) CM / Q* 6PCS

99-66 KG 110X65X70(H) CM 130X114X155(H) CM / Q* 4PCS





TANK EXTENSION 140 I capacity fast coupling



FLAT TANK capacity 160 I + sheet metal platform



SNOW BLADE 85 cm, adjustable laterally ±30°



REAR WHEELS pneumatics





OPTIONAL



Carry Sprayer

motosprayer

MECHANICAL REDUCER
belt transmission

RUNNING SPEED

2.0 km/h

3.6 km/h

SEMI-PROFESSIONAL

Carry Sprayer

 B&S
 Euro

 675 EXI series
 R.170

 163 cc
 173 cc

 2.8 kW
 3.2 kW

Petrol Petrol

STARTER recoil

ENGINE

TRANSMISSION endless screw in oil bath and belts 1 forward gear, reverse gear

diaphragm pump pressure 30 bar, maximum delivery 29 lt/min

WORK sprayer lance with atomizer SYSTEM 25m hose with crank winder

120 It tank with filter

OTHER 10 It handwashing tank

DRIVE WHEELS tyres, tractor profile 13x5.00-6" with mechanical semi-differential

NET WEIGHT 94.5 kg 94 kg

DIMENSIONS 74x131x112(h) cm

GR.WEIGHT 118-119 KG

PACKAGING 145X80X102(H) CM

PALLET 151X82X233(H) CM / Q* 6PCS



TANKcapacity 120 lt. with filter
+ handwashing tank 10 lt



25 M HOSE with crank hose reel holder





DRIVEN WHEELS tractor profile with mechanical semidifferential



LANCIA with pressure atomize





OPTIONAL



Eco Sprayer

motosprayer



Eco Sprayer

ENGINE TRANSMISSION diaphragm pump SBR pressure 4.1 bar, maximum delivery 7.7 lt/min WORK sprayer lance with pressure sprayer 9m hose with hose reel support **SYSTEM** 50 It tank batteries (x2) 12 V 5Ah 10 It handwashing tank **OTHER** front fan sprayer with 2 interchangeable nozzles manual parking brake rear steering wheel, fixed front wheels **NET WEIGHT** 38 kg **DIMENSIONS** 60x115x113(h) cm

GR.WEIGHT 40 KG

PACKAGING 110X65X71(H) CM

PALLET 114X134X225(H) CM / Q* 6PCS





Horticultural passion

A complete range of hobby, semi-professional and professional tools designed and manufactured in Italy: Eurosystems tillers and rear tine tillers, the result of 50 years of experience, are used for the tilling of small and medium plots of land in horticulture, gardening and small agricultural areas.

Versatile and robust, these work tools require little maintenance and are designed to last over time; at the same time, they can be accessorised with numerous options that extend their ability to be used for ploughing or gardening work.

What are the benefits?

1 2 3

We look for the perfect centre of gravity and the correct weight/rotation speed ratio of the tillers to make the task easy, safe and efficient We are one of the last true European producers of this product category which means a shorter production chain, local production and less pollution We design our products in order to last a long time and even today we provide spare parts for models that are more than 40 years old



MECHANICAL GEARBOX chain + belt transmission

RUNNING SPEED

1.8 Km/h
1.0 Km/h

SEMIPROFESSIONAL



	Rtt3				NEW!		
ENGINE	Euro 212.ohv 212 cc 4.0 kW Petrol	Euro R210.ohv 212 cc 4.4 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol	Honda GX160 163 cc 3.6 kW Petrol	Cramer/ greenworks 82 V 2.9 kW dual slot Elettrico		
STARTER	recoil						
HANDLEBAR	vertically adjustable	vertically adjustable	vertically and laterally adjustable	vertically and laterally adjustable	vertically and laterally adjustable		
TRANSMISSION	gears, chain in oil bath and double belt system 2 speed fixed milling, 2 speed reverse						
TILLER	6 stars Ø32 cm - 20 bolted knives work width 60 cm 270 rpm						
OTHER	adjustable spur system for quick visual inspection of correct belt tensioning						
DRIVE WHEELS	tyres, tractor profi with mechanical t						
NET WEIGHT	72 kg	72 kg	70.5 kg	70 kg	61 kg		
DIMENSIONS	63x153x109(h) cm	• • • • • • • • • • • • •			• • • • • • • • • • • • •		

GR.WEIGHT 75-77 KG

PACKAGING 116,5X53X70(H) CM

PALLET 110X120X225(H) CM / Q* 6PCS



DRIVEN WHEELS
with mechanical semidifferential



SMALL ROTAVATOR cutter 32 cm iron wheels Ø35x5



RIDGING PLOW with fixed wings





OPTIONAL





MECHANICAL REDUCER

chain + belt transmission



RUNNING SPEED







AMATEUR



	4	17
K	τ	ζZ

Euro Honda Euro **GP160** 182.ohv R210.ohv CR950 163 cc **ENGINE** 182 cc 212 cc 208 cc 3.1 kW 4.4 kW 4.0 kW 3.6 kW Petrol Petrol Petrol Petrol

STARTER recoil

vertically vertically vertically vertically **HANDLEBAR** and laterally and laterally adjustable adjustable adjustable adjustable

gears, chain in oil bath and double belt system 1 fixed milling speed, reverse **TRANSMISSION**

4 stars Ø32 cm - 16 riveted knives

ROTAVATOR work width 50 cm

270 rpm

adjustable spur **OTHER** system for quick visual inspection of correct belt tensioning

tyres, tractor profile 13x5.00-6" **DRIVE WHEELS** with mechanical transport idler

66 kg 66.5 kg **NET WEIGHT** 65 kg 67 kg

DIMENSIONS 53X116.5X70(h) cm

GR.WEIGHT 71-73 KG

PACKAGING 116,5X53X70(H) CM

110X120X225(H) CM / Q* 6PCS PALLET





SMALL ROTAVATOR cutter 32 cm iron wheels Ø35x5



RIDGING PLOW with fixed wings





OPTIONAL



Euro102

tiller

MECHANICAL GEARBOX gear drive

4

TILLER SPEED





72 rpm 30 rpm 89 rpm

PROFESSIONAL



Euro102

ENGINE	Honda GX160 163 cc 3.6 kW Petrol	Euro 212.ohv 212 cc 4.0 kW Petrol	Euro 178F 296 cc 4.4 kW Diesel					
STARTER	recoil	recoil	recoil or electric	• • • •				
HANDLEBAR	vertically and laterally adj	ustable	• • • • • • • • • • • • • • • • • • • •	• • • •				
TRANSMISSION	made in Italy gearbox with gears in oil bath 3 milling speeds, reverse two power take-offs (PTO), one standard and one synchronised with the gearbox							
ROTAVATOR	6 stars Ø34 cm of which 2 removable - 24 bolted knives work width 95-65 cm tillers rotation 172/130/39 rpm							
OTHER	plant saver discs, adjustable spur							
TRANSPORT WHEELS	optional: • tractor profile tyres 5.00-10" • rubber to be assembled on plant saver discs							
NET WEIGHT	86 kg	95 kg	104 kg					
DIMENSIONS	108X145X92(h) cm	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • •				

↓

GR.WEIGHT 94-112 KG

PACKAGING 95X50,5X90(H) CM

PALLET 110X120X195(H) CM / Q*4PCS





TRACTOR WHEELS pneumatic 5.00-10'



CUTTER EXTENSION work width 112 cm



TRANSPORT WHEELS to be assembled on discs



TAMPING MACHINE with adjustable wings





OPTIONAL



SOIL

Z8



Z8 Honda Furo B&S GX160 212.ohv CR950 **ENGINE** 163 cc 212 cc 208 cc 3.6 kW 4.0 kW 4.0 kW Petrol Petrol Petrol STARTER recoil **HANDLEBAR** vertically and laterally adjustable gears and chain in oil bath and belt **TRANSMISSION** 2+2 milling speed (rpm change via belt reversal), reverse 6 stars Ø33 cm of which 2 removable - 24 bolted knives work width 82-58 cm **ROTAVATOR** standard tillers rotation 101/79 (inverted belt 142/110 rpm labour tillers rotation 101/23 (inverted belt 142/33 rpm) plant saver discs, adjustable spur **TRANSPORT** optional, not included **WHEELS** 88 kg 85 kg 88 kg **NET WEIGHT**

11


DIMENSIONS

GR.WEIGHT 93-90-93KG

PACKAGING 97X52X81.5(H) CM

PALLET 110X120X180(H) CM / Q* 4PCS

82X162X118(h) cm

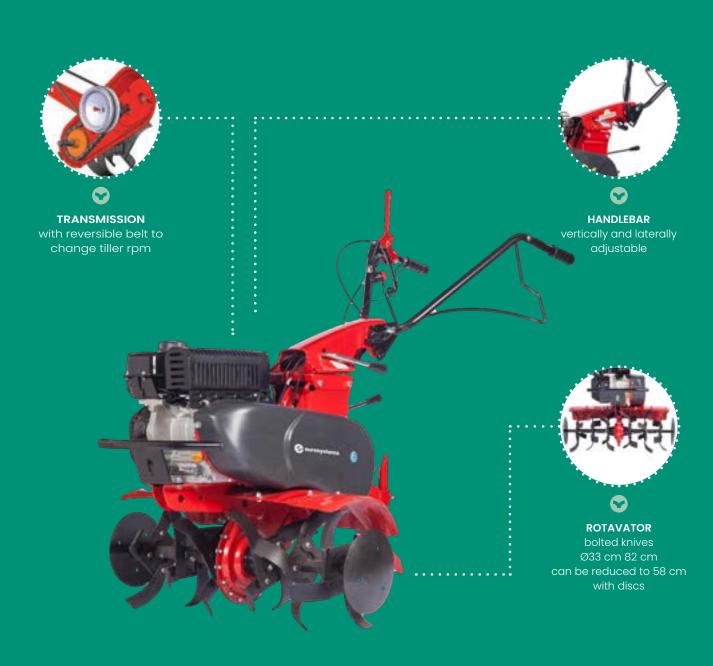



TRANSPORT WHEEL quick tilting



ROTAVATOR
EXTENSION
work width 105 cm



TRANSPORT WHEELS to be assembled on discs



RIDGING PLOW with adjustable wings



LABOUR PRO KIT
5.00-10" wheels + Ratchets
2 ballast wheels 20 kg each
front ballast 15 kg
swivel plough

*only for Z8 labour



AS STANDARD



OPTIONAL



Euro5 evo

tiller



	Euro5 evo	2.1	Euro5 evo LABOUR			
ENGINE	GP160 G 163 cc 10 3.6 kW 3	63 cc 20 3.6 kW 4.0	2 S 2 950 8 cc 0 kW trol	B&S CR950 208 cc 4.0 kW Petrol		
STARTER	recoil			recoil		
HANDLEBAR	vertically and laterally adjustable			vertically and laterally adjustable		
TRANSMISSION	gears and chain in oil bath and belt 2 milling gears, reverse			gears and chain in oil bath and belts 2 milling gears, reverse		
ROTAVATOR	6 stars Ø32 cm of which 2 removable - 24 bolted knives work width 75-50 cm tillers rotation 125/97 rpm			6 stars Ø32 cm of which 2 removable 24 bolted knives work width 75–50 cm tillers rotation 136/27 rpm		
OTHER	plant saver discs, spur			plant saver discs, spur		
TRANSPORT WHEELS	quick release front transport wheel			quick release front transport wheel		
NET WEIGHT	58 kg 58 kg 59 kg			59 kg		
DIMENSIONS	75x140x132(h) cm			75x140x132(h) cm		
	, , , , , , , , , , , , , , , , , , , ,		• • • • • • • • • • • • • • • • • • • •			

11

GR.WEIGHT 63-64 KG


PACKAGING 79X52X71(H) CM

PALLET 80X120X225(H) CM / Q* 6PCS

64 KG

79X52X71(H) CM

80X120X225(H) CM / Q* 6PCS

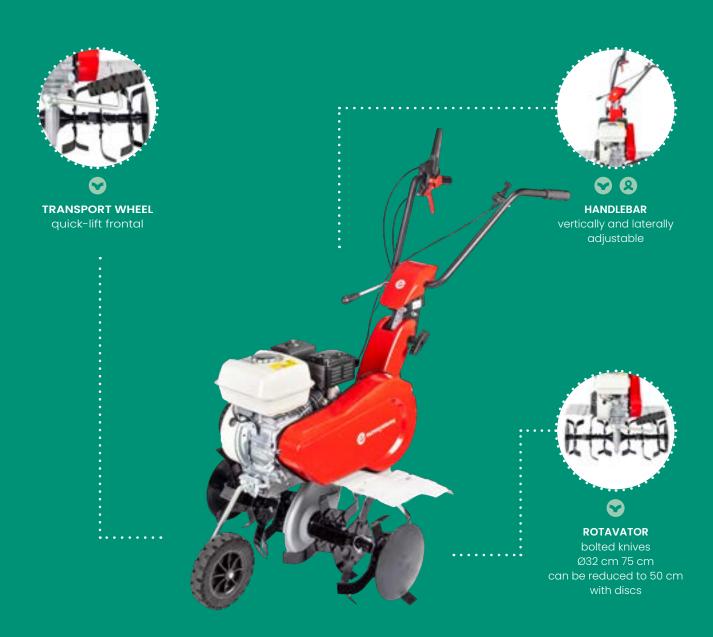





spring-type, 50 cm



with fixed wings



wheels 5.00-10" + fixed axles 2 ballast wheels 20 kg each front ballast 15 kg classic plough

*only for labour version





Euro5 evo

tiller



	Euro5 evo CLASSIC NEW	Euro5 evo ONE
ENGINE	Euro Honda Honda B&S GlobeToo 182.ohv GP160 GX160 CR950 82 V 182 cc 163 cc 163 cc 208 cc 2.9 kW 3.1 kW 3.6 kW 3.6 kW 4.0 kW due slot Petrol Petrol Petrol Electric	Euro R80.ohv 78 cc 1.4 kW Petrol
STARTER	recoil	recoil
HANDLEBAR	vertically adjustable or vertically and laterally adjustable	vertically adjustable
TRANSMISSION	chain in oil bath and belt 1 milling gear, optional reverse	chain in oil bath and belt; 1 milling gear, optional reverse
ROTAVATOR	6 stars Ø32 cm of which 2 removable - 24 riveted knive work width 75-50 cm tillers rotation 125 rpm	es 4 stars Ø32 cm - 16 riveted knives work width 46 cm tillers rotation 120 rpm
OTHER	plant saver discs, spur	spur
TRANSPORT WHEELS	quick release front transport wheel	quick release front transport wheel
NET WEIGHT	51 kg 50.5 kg 50.5 kg 51.5 kg 42.5 kg	38 kg
DIMENSIONS	75x125x123(h) cm	54x137x113(h) cm



GR.WEIGHT 54-56 KG

PACKAGING 79X52X71(H) CM

80X120X225(H) CM / Q* 6PCS

43 KG

79X52X71(H) CM

80X120X225(H) CM / Q* 6PCS









AERATOR spring-type, 50 cm



RIDGING PLOW with fixed wings






OPTIONAL



Euro3 evo

tiller



Euro3 evo

ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	B&S 625 Exi series 150 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R.170 173 cc 3.2 kW Petrol			
STARTER	recoil						
HANDLEBAR	vertically and laterall	y adjustable					
TRANSMISSION	endless screw in oil bath and belt 1 milling gear, optional reverse						
ROTAVATOR	4 stars Ø32 cm - 16 riveted knives work width 50 cm tillers rotation 130 rpm						
OTHER	plant saver discs, adjustable spur						
TRANSPORT WHEELS	quick release double rear wheel						
NET WEIGHT	39 kg	41 kg	39 kg	41.5 kg			
DIMENSIONS	52x142x122(h) cm						

GR.WEIGHT 42-44 KG

PACKAGING 80X59X55(H) CM

PALLET 80X120X233(H) CM / Q* 8PCS





ROTAVATOR EXTENSION work width 75 cm *only B&S625/EURO R170



AERATOR spring-type, 50 cm



RIDGING PLOW with fixed wings






OPTIONAL



SOIL

Z3 tiller



Z3

• • • • • • • • • • • • • • •	• • • • • • • • • • • • •	• • • • • • • • • • • • •	• • • • • • • • • • • • • •	• • • • • • • • • • • • •	• • • • • • • • • • • • • • • •		
ENGINE	B&S 450 E serie 125 cc 1.8 kW Petrol	B&S 625 Exi serie 150 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R.170 173 cc 3.2 kW Petrol	EGOpower+ e-powered 56 V 3,1 kW Battery		
STARTER	recoil	recoil	recoil	recoil	electric		
HANDLEBAR	vertically and lat	erally adjustable					
TRANSMISSION	endless screw in oil bath and belt 1 milling gear, optional reverse						
ROTAVATOR	4 stars Ø32 cm - 16 riveted knives work width 50 cm tillers rotation 130 rpm						
OTHER	plant-saving discs, spur						
TRANSPORT WHEELS	quick release double rear wheel						
NET WEIGHT	40 kg	42 kg	40 kg	42.5 kg	41 kg		
DIMENSIONS	73x50.5x49(h) cm						

I


GR.WEIGHT 43-48 KG

PACKAGING 73X50,5X53(H) CM

PALLET 80X120X225(H) CM / Q* 8PCS



Z2 tiller




	Z2		NEW!				
ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	Euro 123.ohv 123 cc 2.2 kW Petrol	Euro R.145 145 cc 2.5 kW Benzina				
STARTER	recoil		• • • • • • • • • • • • • • • • • • • •				
HANDLEBAR	vertically adjustable		• • • • • • • • • • • • • • • • • • • •				
TRANSMISSION		endless worm gear in oil bath and belt 1 milling gear, optional reverse					
ROTAVATOR	4 stars Ø26 cm - 16 riveted knives work width 40 cm tillers rotation 120 rpm						
OTHER	spur						
TRANSPORT WHEELS	quick release double rear wheel						
NET WEIGHT	29 kg	29 kg	31.5 kg				
DIMENSIONS	50x137x111(h) cm						

11

GR.WEIGHT 32-34 KG


PACKAGING 73X41,5X53(H) CM

PALLET 90X120X225(H) CM / Q* 12PCS

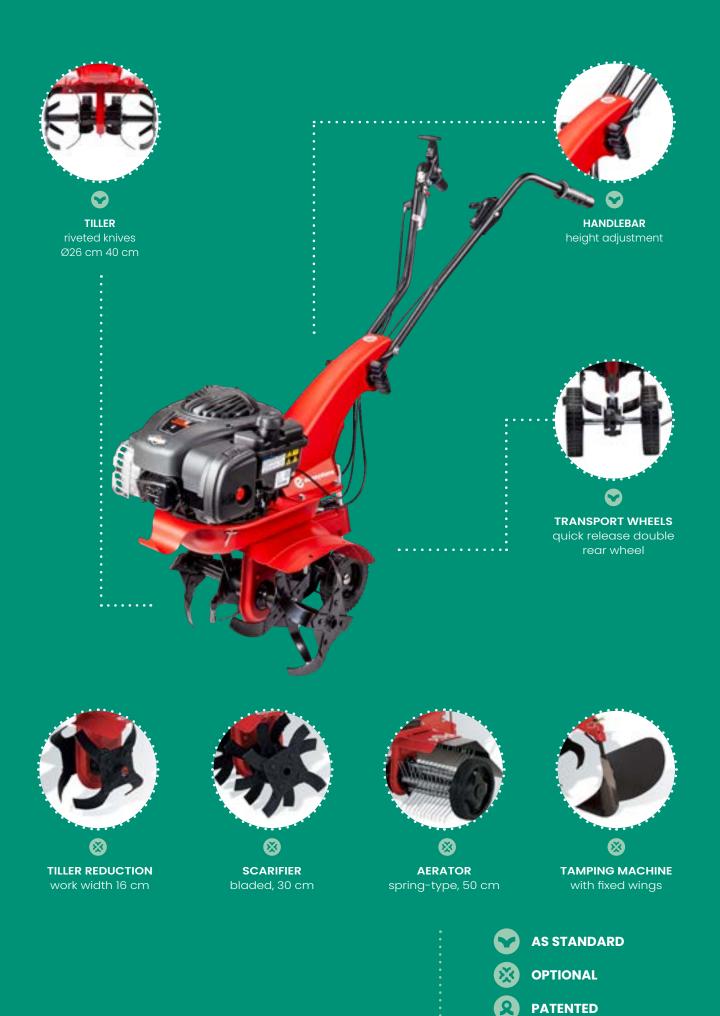

La Zappa

tiller



	La Zappa		NEW!			
ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	Euro 123.ohv 123 cc 2.2 kW Petrol	Euro R.145 145 cc 2.5 kW Benzina	Euro 1300 W 230 V 20 Hz Electric		
STARTER	recoil	recoil	recoil	electric		
HANDLEBAR	vertically adjustable			• • • • • • • • • • • • • • • • • • • •		
TRANSMISSION	endless screw in oil k 1 milling gear	oath and belt				
ROTAVATOR	4 stars Ø26 cm - 16 riveted knives work width 36 cm rotation of endothermic motor tillers 110 rpm, rotation of electric motor tillers 120 rpm					
OTHER	spur					
TRANSPORT WHEELS	removable front transport wheel					
NET WEIGHT	25 kg 25 kg 27 kg 23 kg					
DIMENSIONS	42.5x126x106(h) cm	42.5x126x106(h) cm				

↓↓

GR.WEIGHT 26-30 KG

PACKAGING 66X38,5X46,5(H) CM

PALLET 80X132X200(H) CM / Q* 16PCS





SMALL ROTAVATOR



SCARIFIER bladed, 30 cm



AERATOR spring-type, 50 cm



RIDGING PLOW with fixed wings





OPTIONAL



SOIL



MECHANICAL REDUCER

transmission with clutch



TILLER SPEED



AMATEUR



Z1

Euro

900 W 230 V

ENGINE 230 V

50 Hz Electric

STARTER electric

HANDLEBAR adjustable in two pre-set positions

TRANSMISSION endless screw in oil bath

1 milling gear

4 stars Ø25 cm - 16 riveted knives

ROTAVATOR work width 34 cm

tillers rotation 140 rpm

OTHER fixed spur

TRANSPORT
where quick release double rear wheel

NET WEIGHT 15 kg

DIMENSIONS 43x113x105(h) cm

GR.WEIGHT 17 KG


PACKAGING 37X53,5X55(H) CM

PALLET 80X120X232(H) CM / Q* 16PCS



NOTE:

• • • • • • • • • • • •			• • • • • • • • • • • • • • • • • • • •		 •
• • • • • • • • • • • •					 •
• • • • • • • • • • • •			• • • • • • • • • • • • •		 •
	• • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • •	• • • • • • • • • • • • •	 •
• • • • • • • • • • • •					 •
• • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •				 •
• • • • • • • • • • • •					 •
• • • • • • • • • • • •	• • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • •	• • • • • • • • • • • • •		 •
• • • • • • • • • • • •					 •
• • • • • • • • • • • •					 •
					 •
	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • •	 •
• • • • • • • • • • • •					 •
• • • • • • • • • • • • •					 •
• • • • • • • • • • • • •					 •
• • • • • • • • • • • •					 •
• • • • • • • • • • • •					
• • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •				 •
			• • • • • • • • • • • • • • • • • • • •		 •

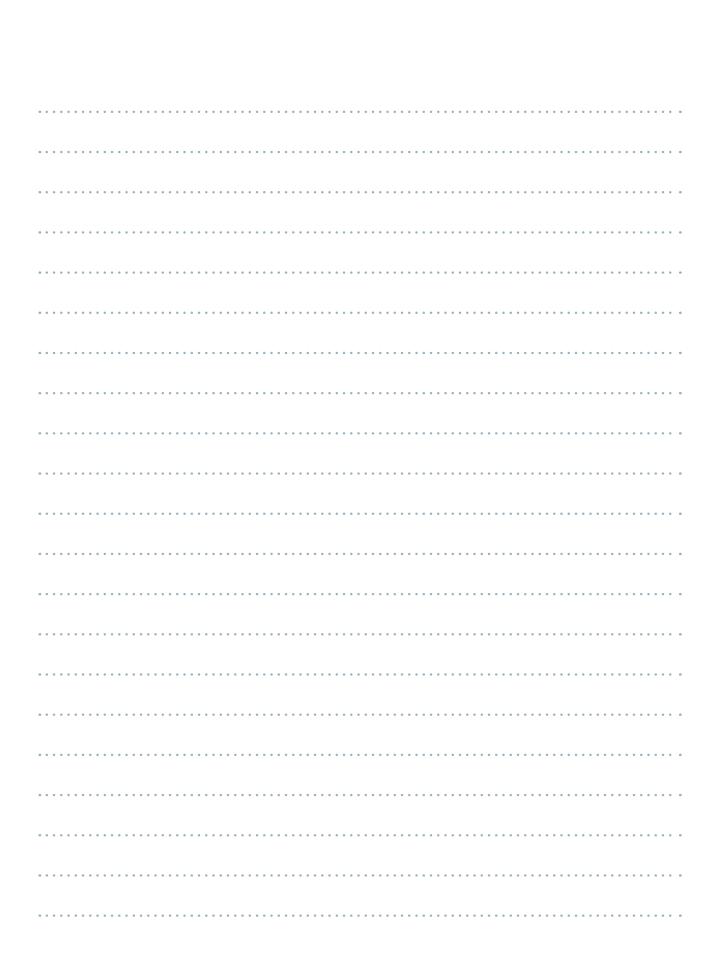



EUROSYSTEMS S.P.A.

via G.Pastore 8 Luzzara (RE) Italy t: 0039 0522 977 169 f: 0039 0522 977 819 info@eurosystems-spa.com www.eurosystems-spa.com

EUROSYSTEMS DEUTSCHLAND GMBH

Im Fuchshau 14 | 73635 Rudersberg t: 0049 07183 305 900 f: 0049 07183 305 9020 info@eurosystems.info www.eurosystems.info